

# Galvanized U-Bolt Kit

## MAR-GUB4240X

### Product Description

1/2"-13 UNC x 2-1/2" x 4" x 1-3/4" Galvanized U-Bolt Kit

### Kit Includes:

- (1) U-bolt
  - (2) Flat Washers per ANSI/ASME B18.22.1
  - (2) Lock Washers per ANSI/ASME 18.21.1
  - (2) SAE J995 Grade 5 Hex Nuts per ANSI/ASME B18.2.2
- Pre-Assembled with >0.25" to end of threads

#### Notes:


**Material:** ASTM A36 (Fy ≥ 36ksi)

#### Feature:

Inside Leg Length	± .060
Thread Length	± .060
Centerline Width	+ .100-.050
Throat Dimension	+ .100-.050
Radius	± .015
Pitch Diameter	Published Standards
Major Diameter	Published Standards
Wire Diameter	Within ± .030 of Pitch Diameter
Angles	± 3°

Centerline tolerances are determined based on the bolt's leg length. The following are recommended tolerances:

Leg Length:	Tolerance:
0-5"	± .030
5"-8"	± .060
8"-12"	± .090
Over 12"	± .120

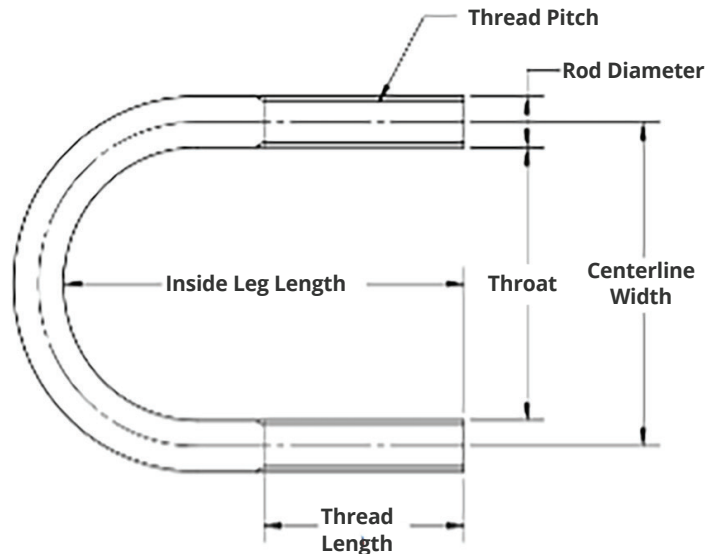



Enduring Quality, Exceptional Value

www.marathonbroadband.com

Specifications

Product Features

<b>Part Number</b>	MAR-GUB4240X
<b>Description</b>	1/2"-13 UNC x 2-1/2" x 4" x 1-3/4" Galvanized U-Bolt Kit
<b>Material</b>	Hot Dip Galvanized Steel
<b>Fastener Grade/Class</b>	SAE J995 Grade 5
<b>Thread Size</b>	1/2"-13
<b>Thread Type</b>	UNC
<b>Thread Spacing</b>	Coarse
<b>Thread Fit</b>	Class 2A
<b>Thread Direction</b>	Right Hand
<b>Throat</b>	2-1/2"
<b>Inside Leg</b>	4"
<b>Thread Length</b>	1-3/4"
<b>Specifications</b>	SAE J995 Grade 5
<b>Country of Origin</b>	India or China

Product Specifications

Part Number	Description	Rod Diameter		Throat		Inside Leg		Thread Pitch	Thread Length		Weight	
		inch	mm	inch	mm	inch	mm		inch	mm	lbs.	kg
MAR-GUB4240X	1/2" x 2-1/2" x 4" Galvanized U-Bolt Kit	0.450	11.4	2.50	63.5	4.0	101.6	1/2-13	1.8	44	0.82	0.37