


Product Reference Sheet

Antenna and RRU Cable Support Bracket MAR-ACSD24X

Product Description

Galvanized Antenna and RRU cable support bracket provides an effective way to mitigate passive intermodulation around 15 feet of antenna (high risk PIM zone). Support bracket consists ports for up to 24 cables. Install with torque wrench set at 40ft-lb to meet carrier PIM requirements.

Typical Applications

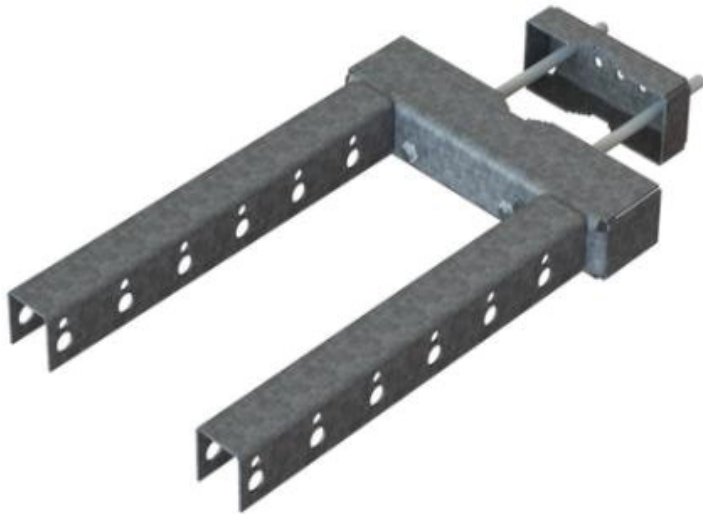

Material List

Item	Description	Qty.
1	1/2" x 10" Galv Threaded Rod	2
2	Welded Snap-in Hanger Arm	2
3	1/2" Galv Lock Washer	4
4	1/2" Galv Hex Nut	6
5	1/2" x 1-1/4" Galv Bolt Kit	2
6	Clamp, Back	1
7	Clamp, Front	1

Specifications

Product Features	
Product Type	Support bracket
Height	3" (7.62cm)
Width	13.7" (34.79cm)
Length	29.3" (74.42cm)
Weight	15.65lb (7.1kg)
Material Type	Hot dip galvanized steel
Mounting Diameter, minimum	1.9" (4.83cm)
Mounting Diameter, maximum	4.5" (11.43cm)
Hole size	3/4" and 7/16" (1.91cm and 1.11cm)
Cable Runs, quantity	24
Hole, quantity	24

Marathon products are available from the following distributors:

Wesco
buy.wesco.com
866.746.3519

Anixter
Anixter.com
866.746.3519

230465D010
D231012-VF